

SMA DPX-101

Electrical Specifications

Port 2-J2- (MHz):

Bandwidth 800-900 MHz

Port 3-J3 (MHz):

Bandwidth 2 1750-2000 MHz

Insertion Loss Ports 1/2:

.5 db Max / .7 db Max

Out of Band Rejection Channel 1/2:

50 db Minimum

Passband Rejection Port to Port:

20 db Minimum

Power Rating:

1W CW Max

Impedance (nominal):

50 ohms


Temperature Range

-40 to +85 deg C.

Connections:

SMA Female

Typical IL(dB) curves for Port2 & Port3 and RL(dB) curve for Port 1

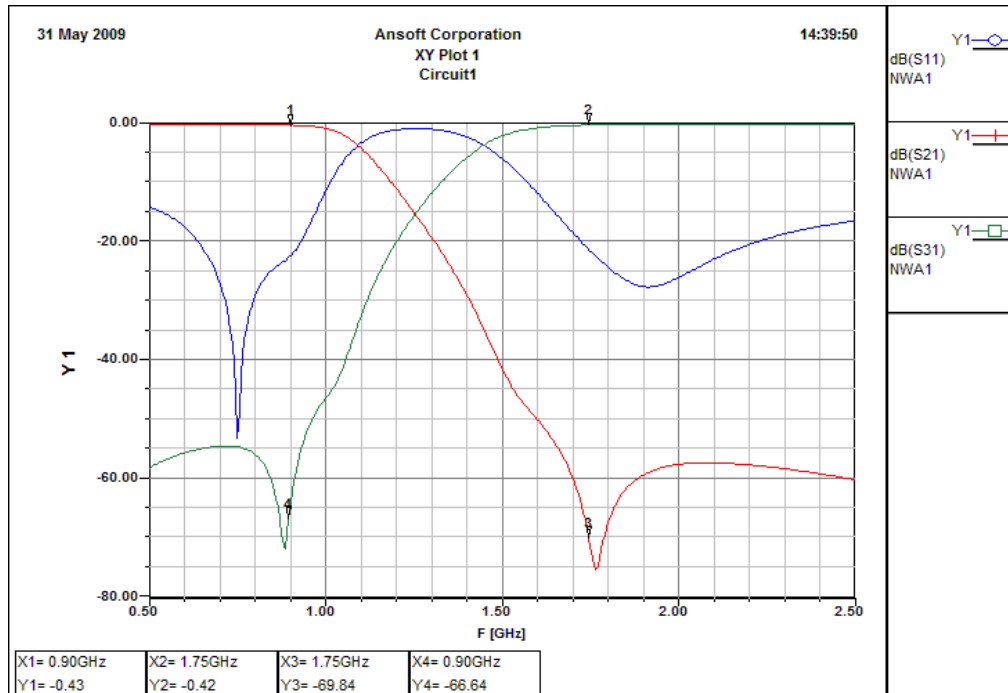

Mechanical Specification

